


TOPCon N type Mono-crystalline *530-550Watt white*

0~+5W POWER TOLERANCE

High efficiency TOPCon N - type solar module

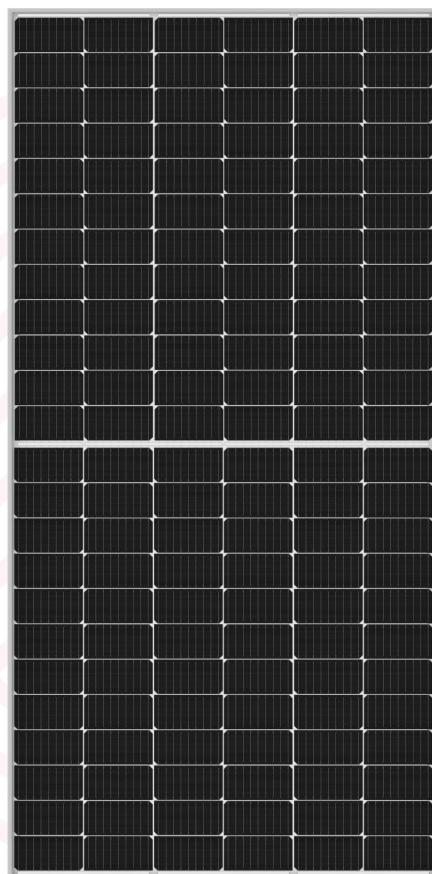

Module characteristics



Strong Mechanical Strength

Passes the wind load test of 2400Mpa and the snow load test of 5400Mpa



Lower attenuation

N-type, good reliability and lower LID/LETID attenuation



PID resistance

The attenuation probability of PID phenomenon is minimized through solar cell production technology optimization and raw material control



Harsh environmental adaptation

Robust design for demanding climate conditions.



Multiple busbar and Half cell technique

More light utilization and current collection capabilities, effectively improving product power output and reliability




Long and reliable quality assurance

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality management system

ISO14001:2015: Environmental management system

ISO45001:2018: Occupational health and safety management system

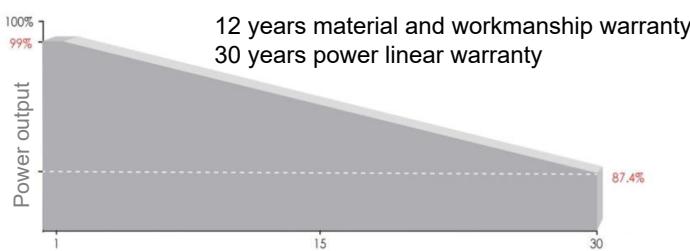

Linear attenuation of 0.4% per year from the 2nd to 30th year.

Electrical Parameters

Model Type	ESM-530T		ESM-535T		ESM-540T		ESM-545T		ESM-550T									
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT								
Maximum Power (Pmax)	530	399	535	405	540	409	545	413	550	417								
Open Circuit Voltage (Voc)	46.30	43.97	46.50	44.17	46.70	44.37	46.90	44.57	47.10	44.77								
Short Circuit Current (Isc)	14.27	11.51	14.31	11.55	14.35	11.59	14.39	11.63	14.43	11.67								
MaximumPowerVoltage (Vm _p)	39.00	36.17	39.20	36.37	39.40	36.57	39.60	36.77	39.80	36.97								
MaximumPowerCurrent (Im _p)	13.59	11.03	13.65	11.13	13.70	11.18	13.76	11.23	13.81	11.28								
ModuleEfficiency - η _m (%)	22.32		22.52		22.74		22.95		23.16									
Operational Temperature	-40°C ~ +85°C																	
Maximum System Voltage	1500VDC																	
Maximum Series Fuse Rating	25A																	
Power Tolerance	0 ~ +5W																	
Temperature Coefficient of Pmax	-0.310%/°C																	
Temperature Coefficient of Voc	-0.260%/°C																	
Temperature Coefficient of Isc	+0.046%/°C																	
Nominal Operating Cell Temperature	45 ± 2°C																	
Safety Class	Class II																	
Max Load (Front/back)	5400Mpa/2400Mpa																	

STC: Irradiance 1000W/m²

NOCT: Irradiance 800W/m²

Cell temperature 25°C


Ambient temperature 25°C

Atmospheric quality = 1.5

Atmospheric quality = 1.5

Wind speed 1m/S

Mechanical Diagrams

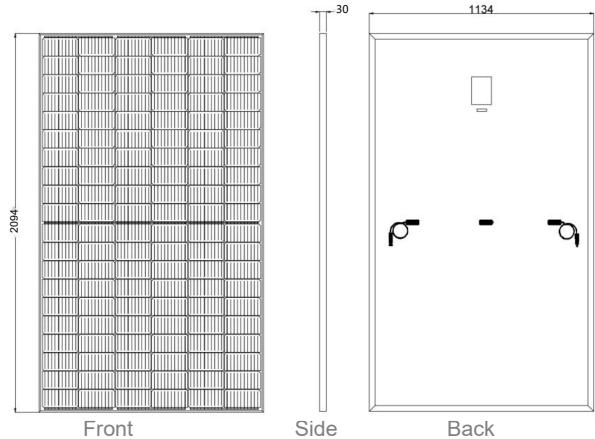


Length: ± 2mm

Width: ± 2mm


Thickness: ± 1mm

Hole pitch: ± 2mm


Curve

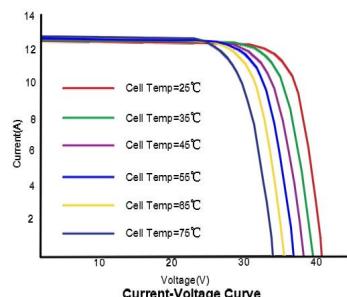

Current-Voltage Curve

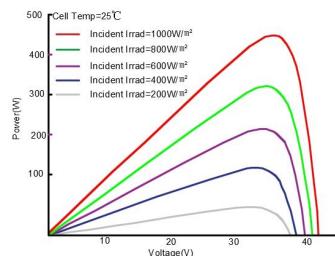

Power-Voltage Curve

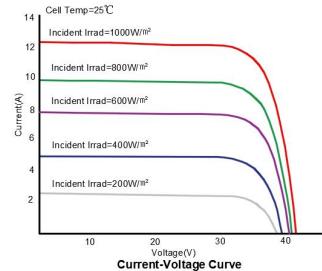

Current-Voltage Curve

Packing Details:

36pcs/pallet

40GP:22 pallets/container, 792pcs/40'HQ

EINNOVA SOLARLINE ENERGY CORP. LIMITED

210000 Nanjing

PEOPLE'S REPUBLIC OF CHINA

TEL: +86-25-8479-2033

Cell: +86-138-13088384

EMAIL : emma.wu@einnova-solarline.com

Website: www.einnova-solarline.com

Specification

Cell type N type mono crystalline 182mm

Half-cell quantity 132pcs (6×22)

Dimension 2094×1134×30mm

Weight 25kg±3%

Glass 3.2mm, tempered and AR coated

Frame Sliver Anodized Aluminum Alloy

Junction Box IP68

Cable 1000mm (can be customized)